

## IP67 200W LED Flood Light Specification

FT-BLLF200WE

FT-BLLF200WB



### Super Power LED Floodlight


1. Adopt the industry high-end COB Led light source Epistar(Taiwan), Cree(Taiwan), Bridgelux (USA)
  2. The innovation of the cooling and temperature balance control technology
  3. Working life > 80000 hours
  4. Led light failure < 2% (10000 hours)
  5. The design of high reliable, high efficiency, constant current power supply
  6. Secondary optical DIWL technology JPN, lens PMMA high light transmittance 98%)
  7. The multiple perspectives, distant, luminous uniform, suitable for different environment lighting needs
  8. The IP67 rating is applicable to outdoor environment
- 5 Years warranty, Meanwell HLG series Power Supply, 95% efficiency**



## 200 Watt LED Flood Light Technical Parameter


<b>The Global Super Bright LED Floodlight</b>	
Part No.	FT-BLLF200WE/FT-BLLF200WB
Wattage	200 Watt
LED Light Source	Epistar, Cree, Bridgelux
Input Voltage	90-305VAC / 50-60HZ
Power Supply	Meanwell HLG series
Power Factor (PF)	≥0.95
Light Attenuation (10,000H)	<2.8%
Luminous Efficiency	110lm/watt-Epistar, 130lm/watt-Bridgelux
Total Lumen	22,000lm-Epistar, 26,000lm-Bridgelux
Light Efficiency	>95%
LED Temperature	50°C±10%
Operating Temperature	-40°C to 60°C
Storage Temperature	-40°C to 85°C
Color Temperature	Warm White /White / Cold white 2800K-9000K
Color Rendering Index	Ra>85
Beam Angle	5/10/ 25/ 40/ 60 / 90 /120degrees
IP Rating	IP67
Economical Lifetime	> 80,000 Hrs
Wind Resistance Index	12 level
Light Body Size (L*W*H)	390 x 316.5 x 95.4mm
Lamp Net Weight	9KG
Package Size (L*W*H)	L440 x W370 x H275mm
Gross Weight	15KG
Warranty	5 Years

## Illumination test (Center Lux)

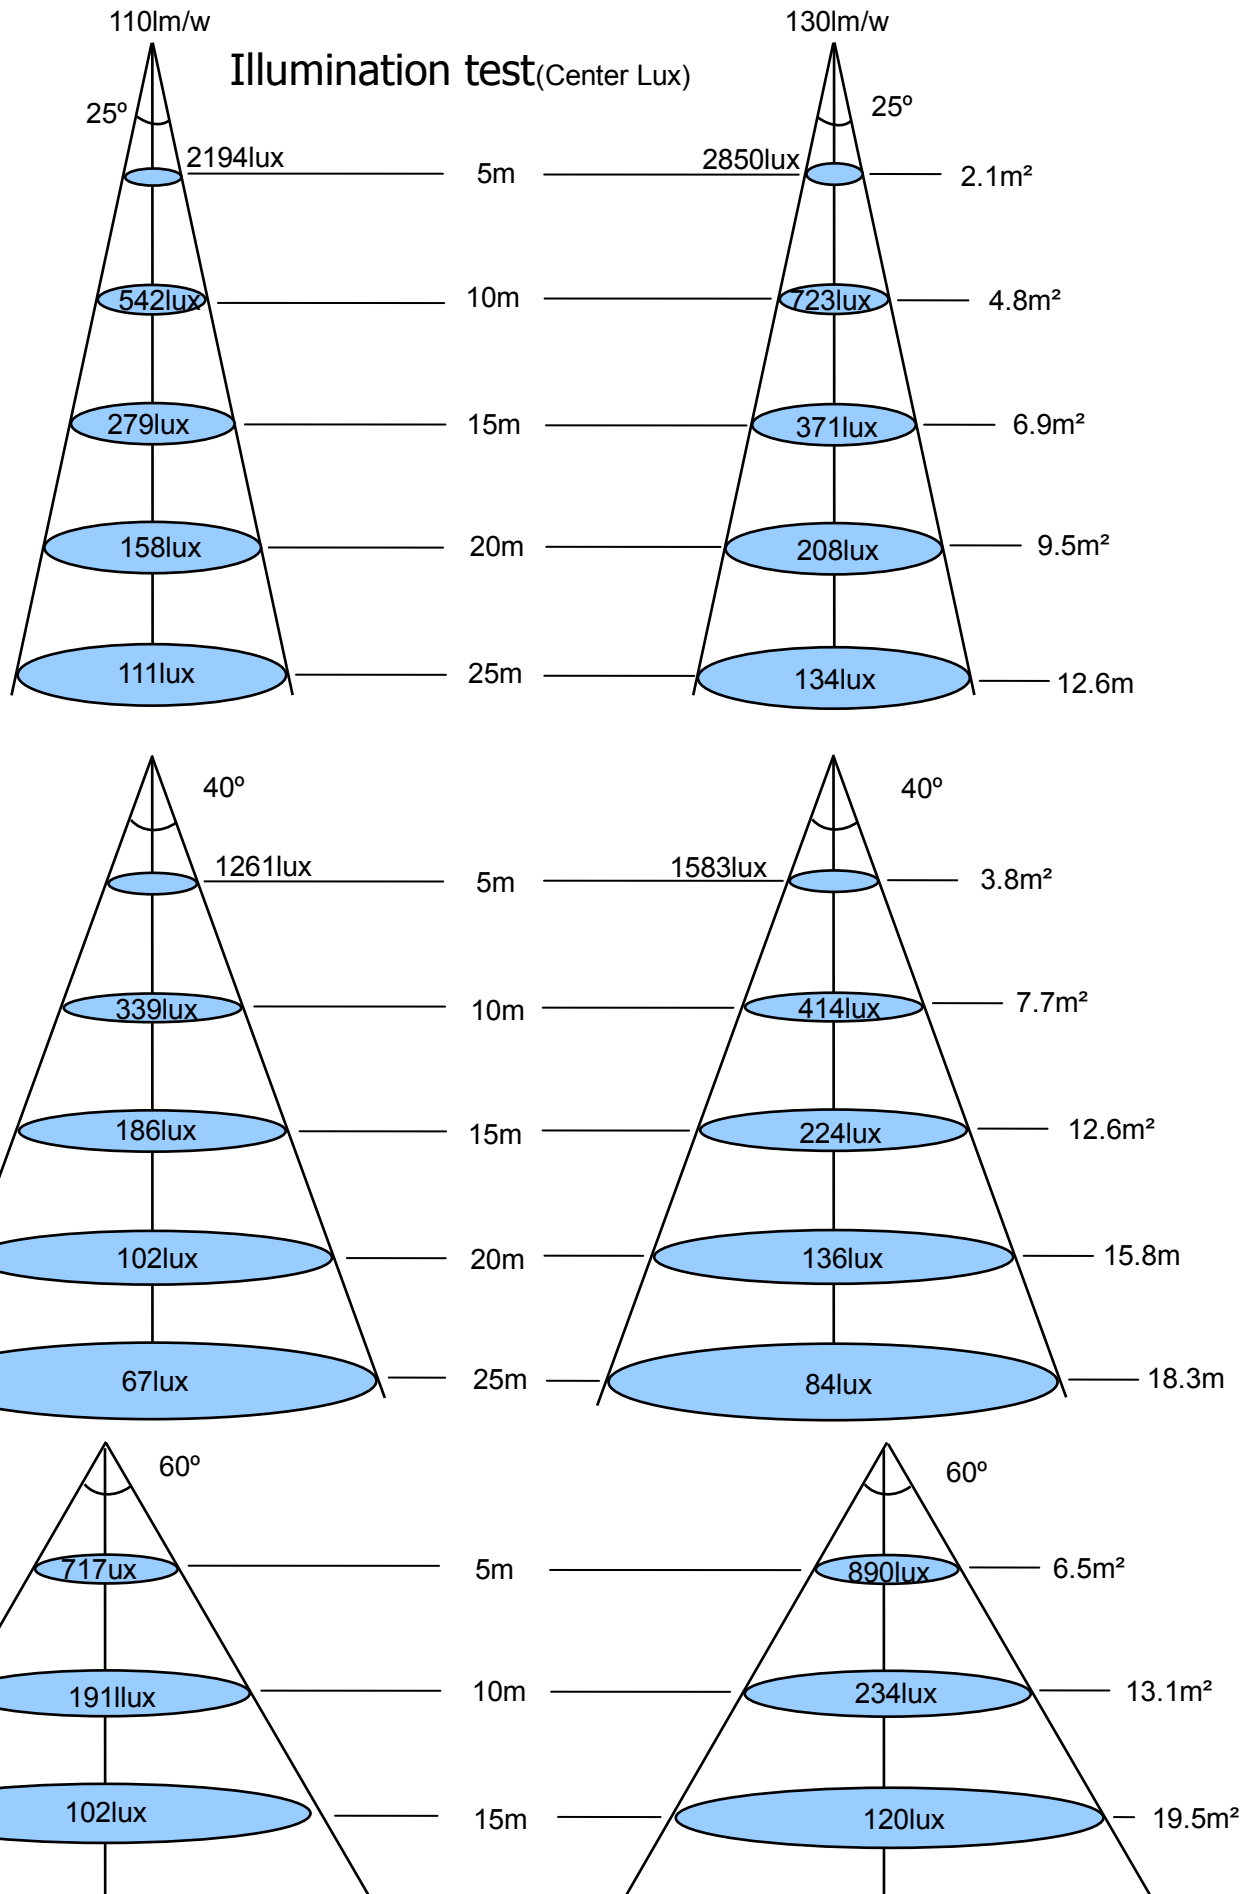


Product      Dimensions      (Units: millimeter)

138 ° Angle rotating

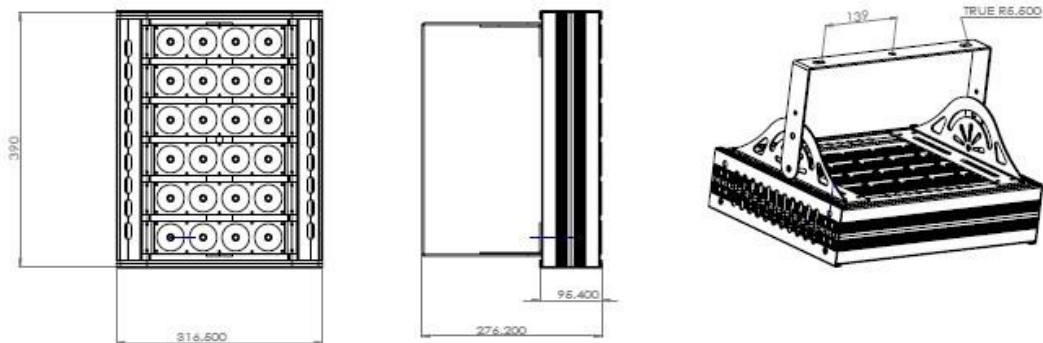

Packag e

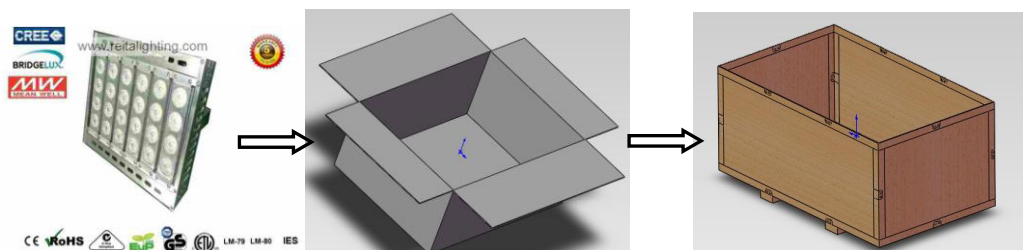

**Wooden Box Package, 15KG**